



Features

Standard programmable resistors are a source of high resistances used as standard equipment for calibration and testing of analog and digital insulation resistance meters.

The resistance obtained thanks to these resistors can be kept for a long time under external direct voltage:

- **SRP-50k0-5T0** | up to **5000 V**,
- **SRP-50k0-10G0** • **SRP-50k0-100G0** | up to **2500 V**,
- **SRP-10G0-10T0** | up to **10 kV**.

The required resistance is set by the user by means of the standard resistor's keypad and - for SRP-50k0-5T0 / SRP-50k0-10G0 / SRP-50k0-100G0 - PC application **SRP Control Software**. Setting of the required value is automatic thanks to commutation of a precision resistance matrix. The control processor calculates the required combination of resistors providing the proper precision of the resultant resistance.



SRP calibration software

The **SRP Control Software** application serves for inter-operation between SRP-50k0-5T0, SRP-50k0-10G0 and SRP-50k0-100G0 resistance calibrators and a computer. The calibrator connects to a computer via USB port.

The application is easy to use and a useful tool in the process of testing devices by means of a calibrator.

Capabilities of the application:

- remote calibrator control,
- creation and saving of automatic programs for testing of equipment,
- resistor settings include a keyboard lock and time until switching to sleep mode,
- change of display brightness and keyboard response sounds,
- language selection in application,
- firmware update from computer via USB interface.

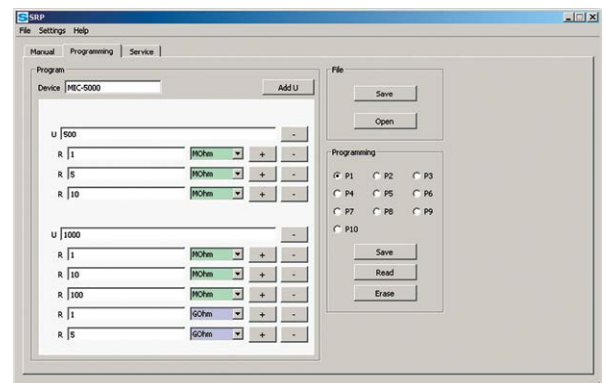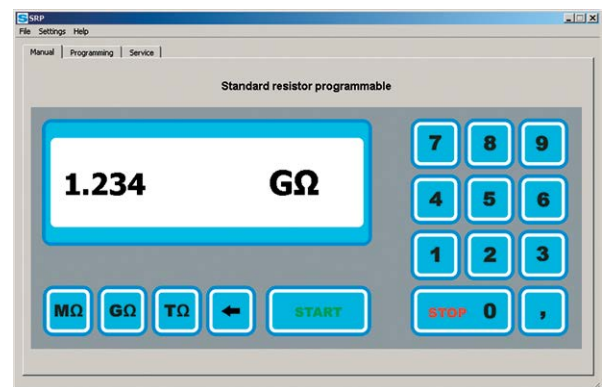

Technical specifications

Model	Display range	Resolution	Accuracy
SRP-10G0-10T0	10 GΩ...10,0 TΩ	from 10 GΩ	from 1% s.v.
SRP-50k0-5T0	50 kΩ...5.0000 TΩ	from 0,05 MΩ	1.5% s.v.
SRP-50k0-100G0	50 kΩ...100.00 GΩ	from 50 kΩ	from 0.05% s.v.
SRP-50k0-10G0	50 kΩ...10.00 GΩ	from 50 kΩ	from 0.1% s.v.

Other technical specifications	
Supply voltage	100...240 V AC (50/60 Hz)
Maximum power consumption	75 VA
Operating temperature range	10...30°C 50...86°F
Maximum current in measuring circuit	3 mA
Maximum operating voltage	
SRP-10G0-10T0	10 000 V DC
SRP-50k0-5T0	5000 V DC
SRP-50k0-100G0	2500 V DC
SRP-50k0-10G0	2500 V DC
Long-term resistor stability	<1%
Dimensions	540 x 450 x 200 mm 21.2" x 17.7" x 7.9"
Weight	ca. 15 kg 33 lbs

Standard programmable resistors are intended for operation at ambient temperatures within the range from 10 to 30°C, relative humidity of air from 25 to 60%, and atmospheric pressure from 630 to 800 mm Hg.

Standard accessories



Test lead 1.8 m
blue 5 kV
(banana plugs)

WAPRZ1X8BUBB



Test lead 1.8 m
red 5 kV
(banana plugs)

WAPRZ1X8REBB



Test lead 1.8 m
black 5 kV
(banana plugs,
shielded)

WAPRZ1X8BLBB



Mains cable 230 V
(IEC C13 plug)

WAPRZ1X8BLIEC



USB cable
only for
• SRP-50k0-5T0
• SRP-50k0-10G0
• SRP-50k0-100G0

WAPRZUSB



SRP Control Software
only for
• SRP-50k0-5T0
• SRP-50k0-10G0
• SRP-50k0-100G0



User manual